



LIFESAVER

240V VISUAL SIGNALLING DEVICE SL240

General:

- ☑ Bright 177 Candela Strobe Light
- ☑ Interconnects with compatible 240V smoke and heat alarms
- ☑ 1 Hz flash rate (60 flashes per min.)
- ☑ MAINS power on indicator
- ☑ Visual indication of alarm condition
- ☑ Tamper resistant
- ☑ The SL240 flashes the strobe when the interconnected smoke or heat alarm is activated to alert occupants.




Note:

This is not a stand alone device. It must be operated by a compatible 240V Smoke or Heat Alarm.

Strobe Light for the Hearing Impaired Interconnects directly with Smoke Alarms and Heat Alarms to provide visual indication for the hearing impaired

Specifications:

Detection Method:	None - Interconnects directly with 240V smoke / heat alarms.
Visual Alarm:	1 Hz flash rate (60 flashes per minute).
Interconnects to:	Up to 24 smoke / heat alarms.
Compatible with:	Smoke Alarms: LIFESAVER 5000, 5800, 5800RL Heat Alarm: LIFESAVER HA240
Compliance:	Complies with UL 1971, NFPA 72, and Americans with Disabilities Act (ADA).
Power Requirement:	240 Volt ac 50 Hz sine wave supply.
Rating:	80mA Inrush current 4.3 Amp.

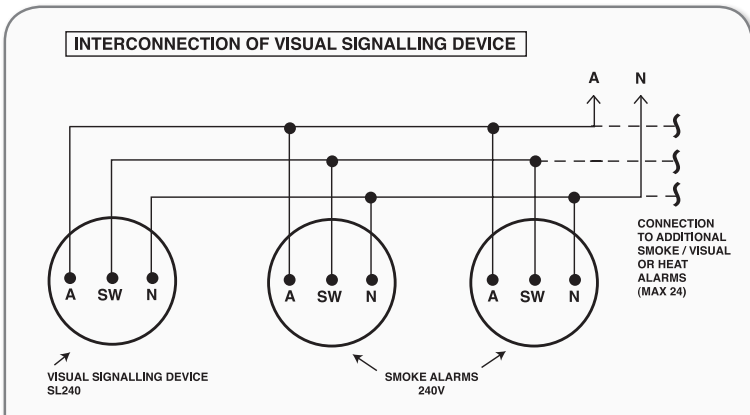

Wiring Diagram

FIRE • SECURITY • INTERCOMS



psaproducts.com.au

1300 772 776

enquiry@psaproducts.com.au