

# WALL MOUNTING BRACKET FOR DOME CAMERA WITH ADAPTOR PLATE


## HLDS-1273ZJ-130



### Features:

- Aluminum alloy material with surface spray treatment
- The outlet hole makes the feature looks better
- Better water proof design
- Convenient installation co-ordinating with lower bowl

### Dimension:

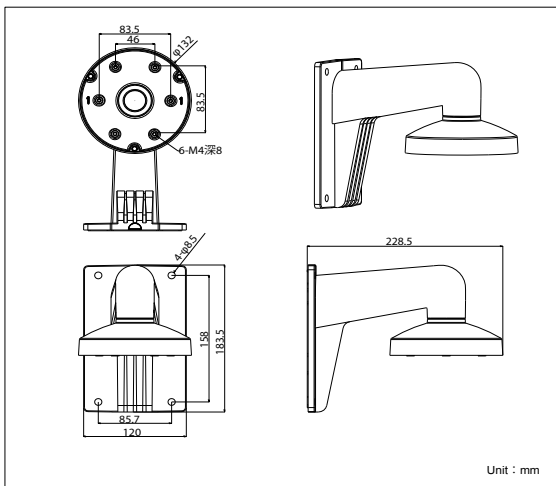

### Parameter:

Model	DS-1273ZJ-130
Parameters	Wall Mounting Bracket for Dome Camera (with adaptor plate)
Appearance	Hik White
Range of Application	Suitable for dome camera wall mounting
Material	Aluminum Alloy
Dimension	132×183.5×228.5mm
Weight	870g

### Notice:


- The bracket should be installed on flat wall
- The wall must be capable of supporting over 3 times as much as the total weight of the camera and the mount.
- The maximum load capacity of the bracket is 4.5KG

### Model Suitable:

HLIPC-T240H, HLIPC-T250H, HLIPC-T280H, HLIPC-T651H-Z


### Installation Step:

- ① Choose the appropriate wall to fix the bracket and wire




A: Cable entry hole

- ② Fix cap to bracket and complete wiring




B: Fastening screw

- ③ Screw up and fix the cap




- ④ Take adaptor from the packaging of bracket




C: Bayonet of adaptor


- ⑤ Check the hole site and fix adaptor to cap



- ⑥ Connect the cable and fix dome camera to cap




- ⑦ Rotate the dome camera moderately and screw up the fastening screw



D: Fastening screw of dome camera

- ⑧ Installation complete



FIRE  
SECURITY  
INTERCOMS

psaproducts.com.au  
1300 772 776  
enquiry@psaproducts.com.au