


IP Intercom Wiring Diagram




One to One System

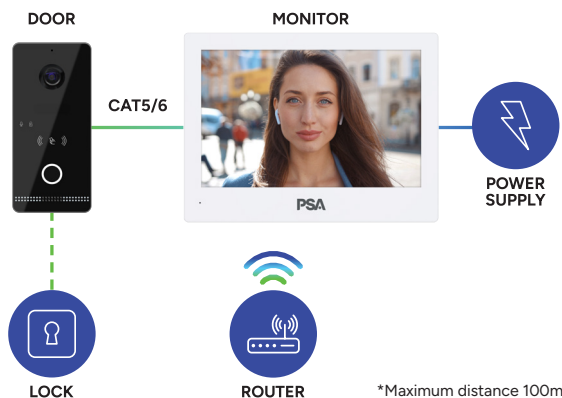

*Maximum distance 100m between door & monitor

Multi-System wiring

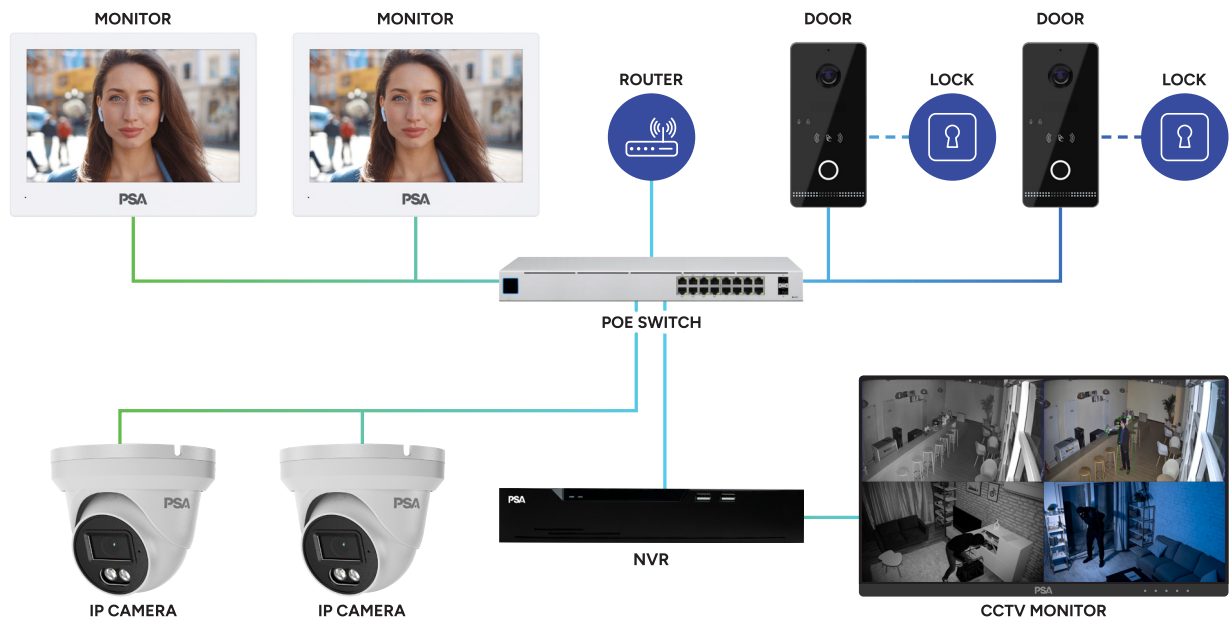


*IP camera resolution no greater than 3072 x 1728 pixels

RJ45 Pinout

T-568A

- | | |
|---|--------------|
| 1 | White Green |
| 2 | Green |
| 3 | White Orange |
| 4 | Blue |
| 5 | White Blue |
| 6 | Orange |
| 7 | White Brown |
| 8 | Brown |

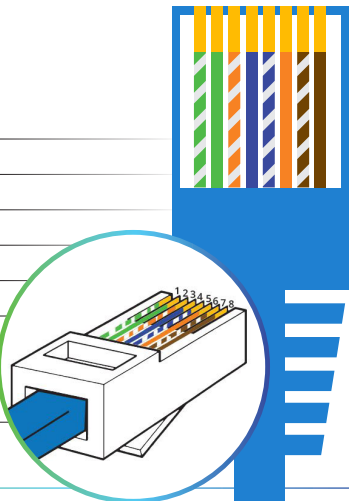

Door Station Wiring

GATE NO	White	Gate Controller
GATE COM	Yellow	
GATE NC	Green	
LOCK -	Blue	Electronic Lock
LOCK +	Grey	

GND	Black
DC +	Red
N/A	Orange
N/A	Orange & White
INPUT 1	Pink

INPUT 2	Brown	Push to Exit button
GND	Black	
WG0	Grey & White	
WG1	Blue & White	

