

PSA LifeSaver

LIFHA240

240V Heat alarm



Features

- **57°C thermal sensor**
Maximum ambient temperature rating: 40 °C
- **Operation**
Single station or interconnect up to 24 units.
- **Test/Hush**
Single Test and Hush button. Hush feature temporarily silences unwanted alarms.
- **Mains Powered**
240VAC with a 9VDC replaceable battery backup.
- **Location**
Ideal for use in kitchens and garages
- **Sounder**
Loud 85dBA sounder at 3m (ISO 8201)

Applications

- Kitchen Areas
- Garages, cellars, attics, workshops and factory.
- High dust & humidity areas

Specifications

Detection Method	Fixed temperature 57°C (thermal sensor)
Sound	85dB at 3 meters
Low Battery Indication	Sounds a "chirp" at 30 - 40 second intervals
Interconnects to	Up to 24
Power Requirement	240 Volt AC 50 Hz sine wave supply
Rating	80mA maximum per alarm
Dimensions	127mm (D) x 50mm (H)
Part Number	LIFHA240
Recommended coverage :	50m ²
Recommended spacing	5.3m
Maximum Distance From Wall	7.7m
Maximum Ceiling Height	6m
Approve to	AS1603.3:2018
Warranty	10 years

This product must be installed by a licensed electrical contractor.
Specifications may change without notice



10 Year
Warranty

PSA LifeSaver

LIFHA240


240V Heat alarm



Compatibility

6800	240V, 9V battery backup smoke alarm *Hardwire interconnect only
6800RL	240V, 10yr backup battery smoke alarm (non-replaceable) *Hardwire interconnect only
6000	240V, 9V battery backup smoke alarm *Hardwire interconnect only
6000RL	240V, 10yr backup battery smoke alarm (non-replaceable) *Hardwire interconnect only
LIFCO240	Carbon Monoxide Alarm

Wiring Diagram

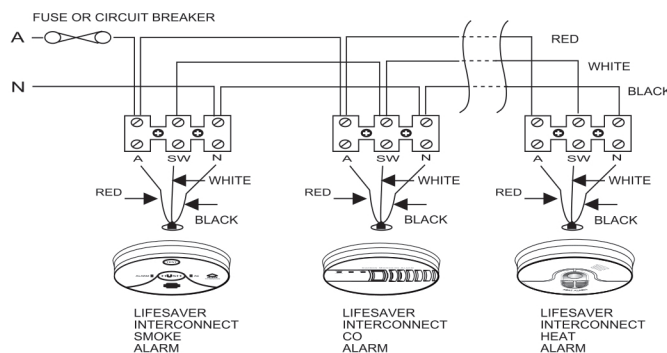

Tested & Complies to
Australian Standards
AS1603.3:2018



A family
owned
Australian
business

Item Code	Single	Pack	Carton
Quantity	1	6	24
Barcode	9318475024010	19318475024017	29318475024014