

PSA LifeSaver

LIFHA240

240V Heat alarm



Features

- **57°C thermal sensor**
Maximum ambient temperature rating: 40 °C
- **Operation**
Single station or interconnect up to 24 units.
- **Test/Hush**
Single Test and Hush button. Hush feature temporarily silences unwanted alarms.
- **Mains Powered**
240VAC with a 9VDC replaceable battery backup.
- **Location**
Ideal for use in kitchens and garages
- **Sounder**
Loud 85dBA sounder at 3m (ISO 8201)

Applications

- Kitchen Areas
- Garages, cellars, attics, workshops and factory.
- High dust & humidity areas

Specifications

Detection Method	Fixed temperature 57°C (thermal sensor)
Sound	85dB at 3 meters
Low Battery Indication	Sounds a "chirp" at 30 - 40 second intervals
Interconnects to	Up to 24
Power Requirement	240 Volt AC 50 Hz sine wave supply
Rating	80mA maximum per alarm
Dimensions	127mm (D) x 50mm (H)
Part Number	LIFHA240
Recommended coverage :	50m ²
Recommended spacing	5.3m
Maximum Distance From Wall	7.7m
Maximum Ceiling Height	6m
Approve to	AS1603.3:2018
Warranty	10 years

This product must be installed by a licensed electrical contractor. Specifications may change without notice



10 Year Warranty

PSA LifeSaver

LIFHA240


240V Heat alarm



Compatibility

6800	240V, 9V battery backup smoke alarm (requires 6000WB)
6800RL	240V, 10yr backup battery smoke alarm (non-replaceable) (requires 6000WB)
6000	240V, 9V battery backup smoke alarm (requires 6000WB)
6000RL	240V, 10yr backup battery smoke alarm (non-replaceable) (requires 6000WB)
LIFCO240	Carbon Monoxide Alarm

Wiring Diagram

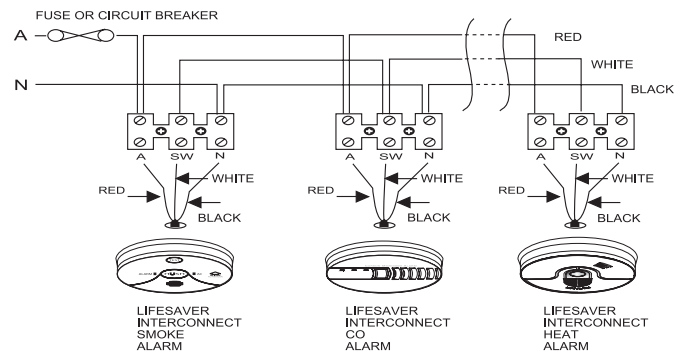

Tested & Complies to Australian Standards AS1603.3:2018



Item Code	Single	Pack	Carton
Quantity	1	6	24
Barcode	9318475024010	19318475024017	29318475024014