

# PSA Centrii

## CENIPCB528DL

5MP Smart Dual Light Bullet  
Network Camera



PSA's dual light bullet cameras allow full colour vision at night when human intrusion is detected. The activation of the light also acts as a deterrent.

### Features

- 1/3" 2.8mm progressive scan CMOS lens
- Max resolution 5MP (2560×1920) @ 20fps
- Dual LED lights for full colour night vision
- Human intrusion and line cross detection
- Intelligent detection: Perimeter, Single Virtual fence
- DWDR, 3D DNR, HLC, BLC, Defog
- Built-in Microphone and Speaker
- LED range up to 20 m
- 12V DC/PoE power supply
- IP66

### Specifications

<b>Camera</b>	
Image Sensor	1/3" Progressive Scan CMOS
Max. Resolution	2560(H)×1920(V)
Electronic Shutter	Auto/Manual, 1/5 ~ 1/20,000s
Min. illumination	Color: 0.1 Lux @ (F1.2,AGC ON) , B/W: 0 Lux @ (IR LED ON)
S/N Ratio	55 dB
Day/Night	Auto(ICR)/Day / Night
Wide Dynamic Range	DWDR
LED Range	IR range up to 20 m White LED range up to 20 m
IR On/Off Control	Auto/Manual
<b>Lens</b>	
Lens Type	Fixed focal
Iris	Fixed Iris
Focal Length	2.8 mm
F Number	F1.6
Angle of View	H: 77.6°, V: 41°
<b>Video</b>	
Streaming Capability	2 Streams
Stream/Frame Rate	Main Stream: 2560×1920, 2560×1440, 2304×1520, 1920×1080, 1280×720 @ 20fps Sub Stream: 640×360 @ 20fps
Bit Rate Control	CBR/VBR
Bit Rate	Main Stream: 128kbps ~ 4096kbps Sub Stream: 16kbps ~ 1536kbps
Image Adjustment	Brightness/Sharpness/Contrast/Saturation
White Balance	Auto/Manual
Mirror	Support
Noise Reduction	2D/3D DNR
Image Enhancement	WDR/HLC/BLC/Defog
Motion Detection	Support
Privacy Masking	Support
<b>Smart Function</b>	
Human Detection	Support
Smart Event	Perimeter, Single Virtual Fence



### PSA Centrii App



Free app provided,  
support remote viewing  
on iOS or Android



**Specifications**

<b>Network</b>	
<b>Protocols</b>	IPv4, RTSP/RTP/RTCP, TCP/UDP, HTTPS, DHCP, DNS, DDNS, UPNP, ICMP, IGMP, NTP, SMTP, 802.1x, SNMP
<b>Interoperability</b>	ONVIF, SDK
<b>Max. User Access</b>	4 Users
<b>Web Viewer</b>	<IE11, Chrome, Firefox, Microsoft Edge
<b>Management Software</b>	Central Management Software (CMS)
<b>Interface</b>	
<b>Ethernet</b>	1 Ethernet (10/100 Base-T) RJ-45 Connector
<b>Audio</b>	Built-in Mic and Speaker
<b>Storage</b>	Built-in Micro SD slot, up to 256GB
<b>Reset Button</b>	Support
<b>General</b>	
<b>Power Supply</b>	DC12V/POE (IEEE 802.3af)
<b>Power Consumption</b>	Max 8W
<b>Operating Temperature</b>	-35°C ~ 55°C (-31°F ~ 131°F )
<b>Operating Humidity</b>	Less than 90% RH
<b>Ingress Protection</b>	IP66
<b>Certifications</b>	CE/FCC
<b>Casing</b>	Metal
<b>Dimensions</b>	172mm L x 70mm D
<b>Net Weight</b>	0.35kg

**Dimensions**

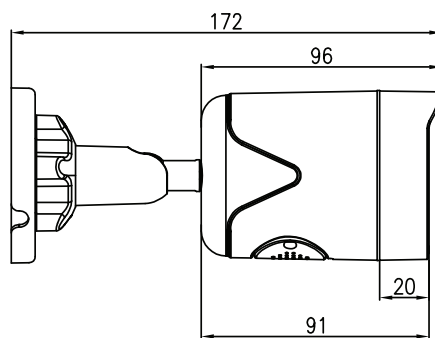

Specifications may change without notice

<b>Item Code</b>	CENIPCB528DL		
<b>Description</b>	5MP Full Colour Bullet Network Camera		
<b>Carton Qty</b>	1		27
<b>Barcode</b>	9318475002322		19318475002329