



LIFESAVER

SMOKE ALARM ISOLATION RELAY LIFRK10A/9

General:

- ✔ Suitable for connection to auxiliary devices, security alarm panels and fire indication panels.
- ✔ Operates in absence of mains voltage and only when smoke alarm is in alarm state.
- ✔ Relay switched from signal voltage (9V output) from smoke alarm.
- ✔ 240V AC / 30V DC 10Amp contact rating
- ✔ Normally Open and Normally Close contact options
- ✔ 24V DC input to trigger 4th terminal smoke alarms as part of an early warning system




Specifications:


Operating Coil Voltage	6V – 10V DC
Secondary Contacts	Normally Open Normally Closed (change-over contacts)
Secondary Contact Rating	240V AC 50Hz @ 10Amps 30V DC @ 10Amps
Contact Switching Time Delay	8 seconds once activated
Maximum No. of interconnected smoke alarms to a single RK10A/9 unit	24
Operating Temperature	0° – 50°C
Dimensions	89mm Deep x 68mm Wide x 45mm High

Compatible with PSA's complete range of smoke alarms, heat alarms and strobe lights.

RK10A/9 Connection to Auxiliary Devices

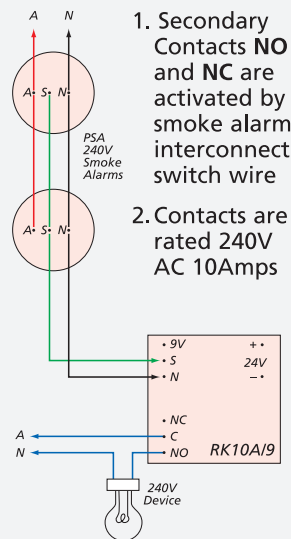

RK10A/9 Connection to Fire Panel and 4th Terminal EWIS operation

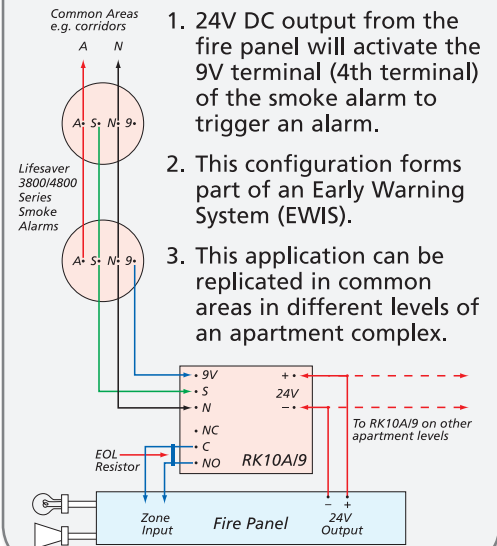

FIRE • SECURITY • INTERCOMS



psaproducts.com.au
1300 772 776

enquiry@psaproducts.com.au