VIDEO INTERCOM WITH MEMORY
790 SERIES

Choose PSA for intercoms

Indoor Monitor (PAN790M)

- ☑ 7" Colour TFT LED display
- ☑ Super slim aluminum front and back panels
- ☑ Picture recording with internal memory
- ☑ Motion recording with SD card memory (not supplied)
- ☑ Hands-free communication
- ☑ Internal paging & intercom function
- ☑ Baby monitoring function
- ☑ Mute function
- ☑ Monitoring function
- ☑ 16 selectable door chimes
- ☑ Door release (electric strike required)
- ☑ 5 wires system
- ☑ 200mm (W) x 125mm (H) x 18mm (D)

Surface Camera (PAN790SC)
Flush Camera (PAN790FC)

- ☑ Robust aluminum construction
- ☑ Illuminated name plate
- ☑ Weather resistant IP44
- ☑ LED lights for night vision
- ☑ Wide angle 120 degree view
- ☑ Rain hood included for surface mount
- ☑ Wall box included for flush mount
- ☑ Surface without rainhood: 98mm (W) x 173mm (H) x 35mm (D)
- ☑ Flush Plate: 122mm (W) x 182mm (H) x 4mm (D)
- ☑ Wall-box: 92mm (W) x 144mm (H) x 38mm (D)

OPTIONAL ACCESSORIES:

- ☑ Door Controller (PAN790DC)
- ☑ Electric Strikes (Flush - GEMGK310, Surface - GEMGK350)

CABLE REQUIREMENTS:

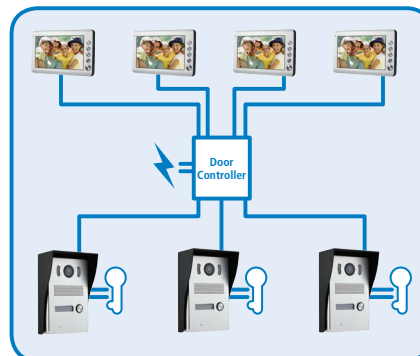- ☑ 0-50m: CAT-5
- ☑ 51-100m: RG59 Coaxial + 4 Core 14/020

PAN790SC   **PAN790FC**

KITS AVAILABLE:

Part Number	Description
PAN790SK	Indoor Monitor (PAN790M), Surface Door Camera (PAN790SC), Power Supply
PAN790FK	Indoor Monitor (PAN790M), Flush Door Camera (PAN790FC), Power Supply

Scan for product details

SYSTEM CAPABILITY:

3 doors can connect to 4 monitors (using door controller)

Door Controller

Door Release is 12VDC output from camera

FIRE • SECURITY • INTERCOMS