


PSA Centrii

Apartment IP Video Door Station

CEN28DSAP-IP

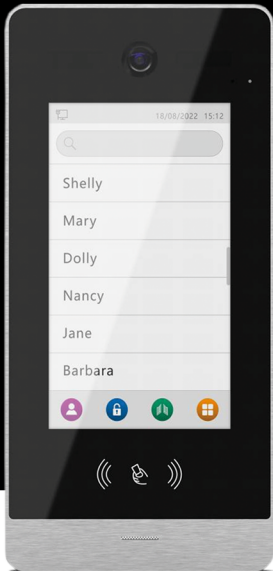

Features

- 7" IPS Display (1024×600)**

Clear, vibrant touchscreen for easy navigation and viewing.
- 2MP HD Smart IR Camera**

Sharp video with automatic infrared night vision.
- 125° Viewing Angle**

Wide field of view for better entrance coverage.
- Web Configuration Support**

Simple setup and management via web interface.
- Exit Button Support**

Convenient indoor door release control.
- Door Contact Input**

Monitors door open/close status for added security.
- Card Swipe Unlock**

Fast and secure access using RFID cards.
- Password Unlock**

Flexible entry with PIN code access.
- Dual Relay Control (Door/Gate)**

Independently control door and gate access.
- Metal Body & Tempered Glass Panel**

Robust, vandal-resistant construction.
- Flush Mount Support**

Clean, seamless installation finish.
- IK07 & IP65 Protection**

Impact-resistant and weatherproof for outdoor use.
- PoE / DC15V Power**

Flexible power options for easy installation.

Specifications

Apartments	9999
Operation system	Embedded linux
Screen	7" IPS touch screen, 1024x600
Angle of view	H:125°, V:72°
Video compression standard	H.265 (default), H.264
Noise reduction	3D noise reduction
Night vision	Smart IR
Video frame rate	Main stream: 1920x1080p, 720p, Sub stream: 640x360
Audio intercom	Full duplex
Network interface	10M / 100M adaptive belt POE
Network protocol	TCP/IP, RTSP
Gate	NO (MAX AC/DC30V 4A)
Lock control	NO/NC (MAX AC/DC30V 4A)
Wiegand 26/34 output	Set via the web
Exit button	Support
Door contact input	Support
Tamper alarm	Support
RFID	13.56MHZ/Mifare/Supports ISO/IEC 14443 type A 106kb/s
	Number of cards supported: 10000
	Card reading distance: ≤2cm
Protection grade	IK07; IP65
Power supply	POE IEEE 802.3af / DC15V, 0.8A
Power consumption	≤5.5W (Standby), ≤9.5W (Working)
Working temperature	-30°C to +60°C (-22°F to +140°F)
Working humidity	10%RH – 90%RH (non-condensing)
Flush box dimensions	250x110x33mm
Product size	268x128x26mm

Apartment IP Video Door Station

CEN28DSAP-IP


LIFT & ACCESS CONTROL MODULES

Model	CEN28MEC-IP	CEN28FEC-IP	CEN28AC-IP
			
Features	Master Elevator Controller	Floor Control Extension	Access Controller
Ethernet	10M/100Mbps	/	10M/100Mbps
Relay	4	16	1
Door contact	/	/	1
Exit button	/	/	1
Wiegand input	1	1	1
Materials	Plastic	/	Plastic
Communication	TCP/IP RS485	RS485	TCP/IP RS485
Working Temperature	-10°C to +50°C	-10°C to +50°C	-10°C to +50°C
Power Supply	POE IEEE 802.3af / DC12-24V, 4W	DC12-24V, 5W	POE IEEE 802.3af / DC12-24V, 3W
Dimensions	90x72x59mm	123x94x24mm	90x72x59mm

Apartment IP Video Door Station

CEN28DSAP-IP

Typical Application

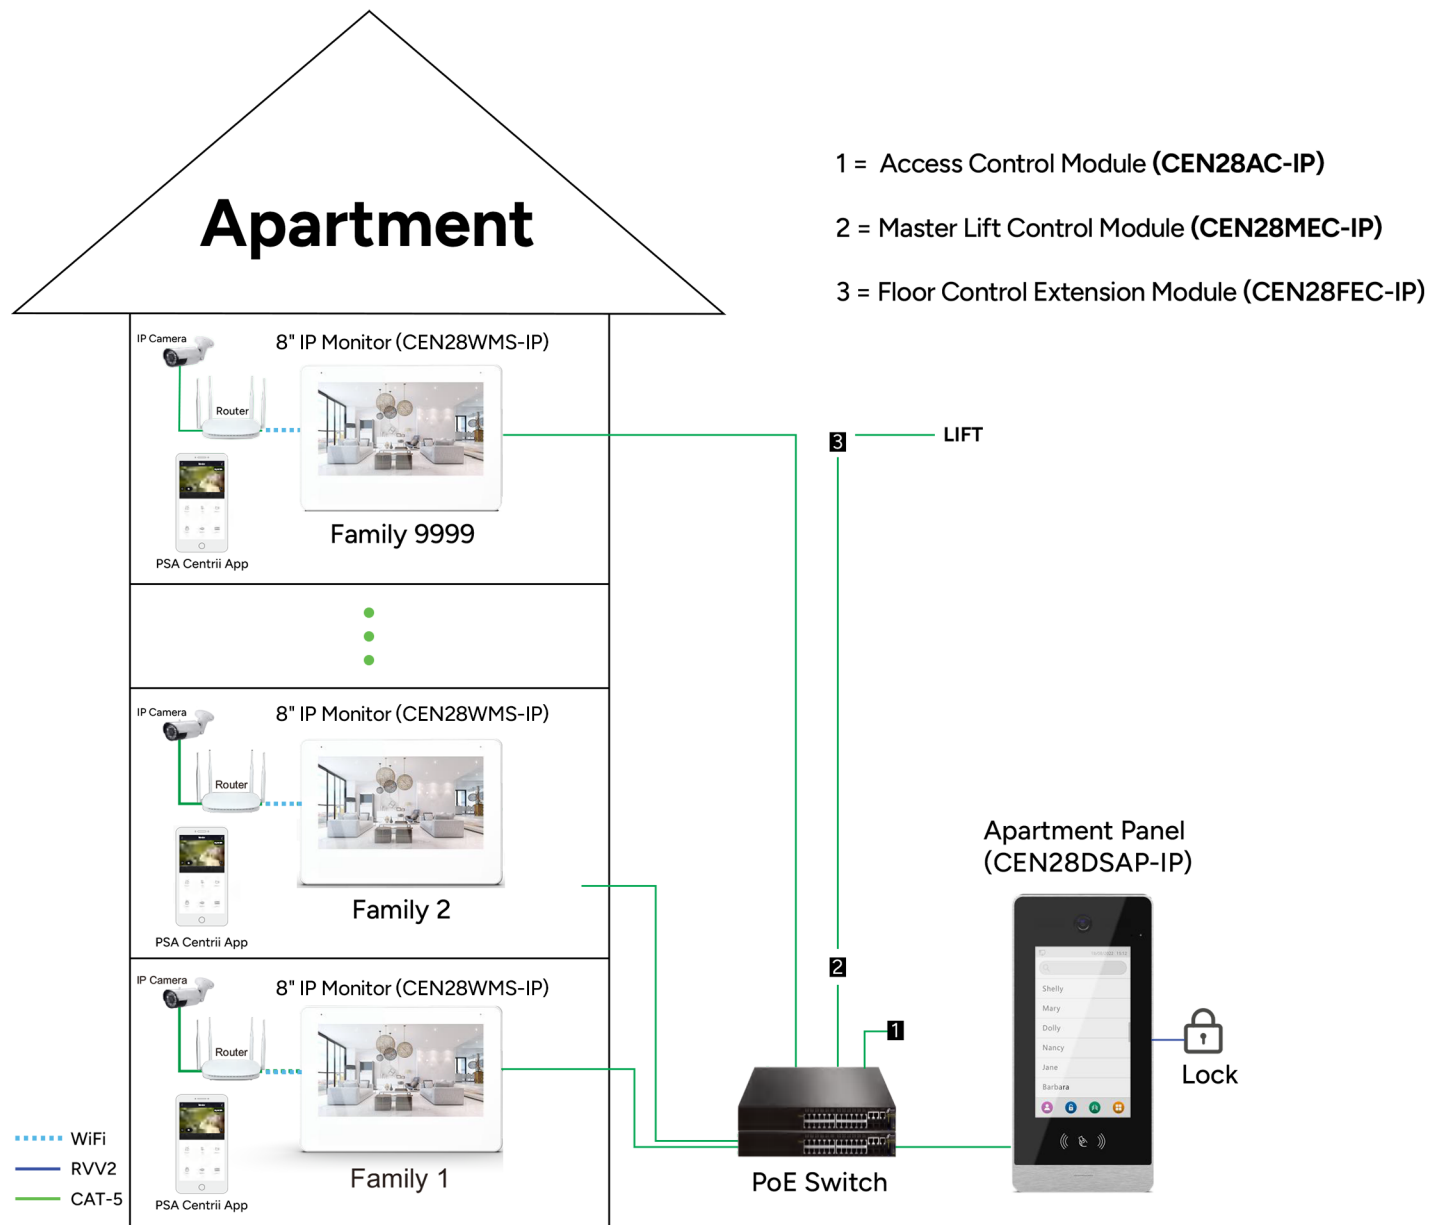

PSA Centrii App

Free app provided,
support remote viewing
on iOS or Android

