



HiLook
Powered by HIKVISION

2MP TURBO HD DOME CAMERA

HLTHC-T120-M



KEY FEATURES

- 2MP high-performance CMOS
- 1920 × 1080 resolution
- 2.8mm fixed lens
- Day/Night switch
- EXIR 2.0, smart IR, up to 20 m IR distance
- 4 in 1 video output (switchable TVI/AHD/CVI/CVBS)
- IP66



FIRE • SECURITY • INTERCOMS

17 Millicent Street, Burwood, VIC 3125 Australia
Tel: 1300 PSA PRODUCTS (1300 772 776)
Fax: (03) 9888 9993
enquiry@psaproducts.com.au psaproducts.com.au

PSA PSA Products
FIRE • SECURITY • INTERCOMS



SPECIFICATIONS


Model

HLTHC-T120-M

Model		HLTHC-T120-M
Camera	Image Sensor	2 MP CMOS image sensor
	Signal System	PAL/NTSC
	Resolution	1920 (H) × 1080 (V)
	Min. Illumination	0.01 Lux@(F1.2, AGC ON), 0 Lux with IR
	Shutter Time	1/25 (1/30) s to 1/50,000 s
	Lens	2.8 mm
	Horizontal Field of View	103° (2.8 mm)
	Lens Mount	M12
	Day & Night	IR cut filter
	Angle Adjustment	Pan: 0° to 360°, Tilt: 0° to 75°, Rotation: 0° to 360°
	Synchronization	Internal synchronization
	Video Frame Rate	PAL: 1080p@25fps NTSC: 1080p@30fps
Menu	AGC	High/Medium/Low/Off
	D/N Mode	Auto/Color/BW (Black and White)
	BLC	Support
	DWDR	Support
	Language	English
	Functions	Brightness, Sharpness, DNR, Mirror, Smart IR
Interface	Video Output	1 HD analog output
	Switch Button	TVI/AHD/CVI/CVBS
General	Operating Conditions	-40 °C to 60 °C (-40 °F to 140 °F), Humidity: 90% or less (non-condensation)
	Power Supply	12 VDC ±15%
	Power Consumption	Max. 4 W
	Protection Level	IP66
	Material	Metal
	IR Range	Up to 20 m
	Dimensions	Ø 82.6 mm × 69.66 mm (Ø 3.38" × 2.74")
	Weight	230 g (0.51 lb.)



DIMENSIONS

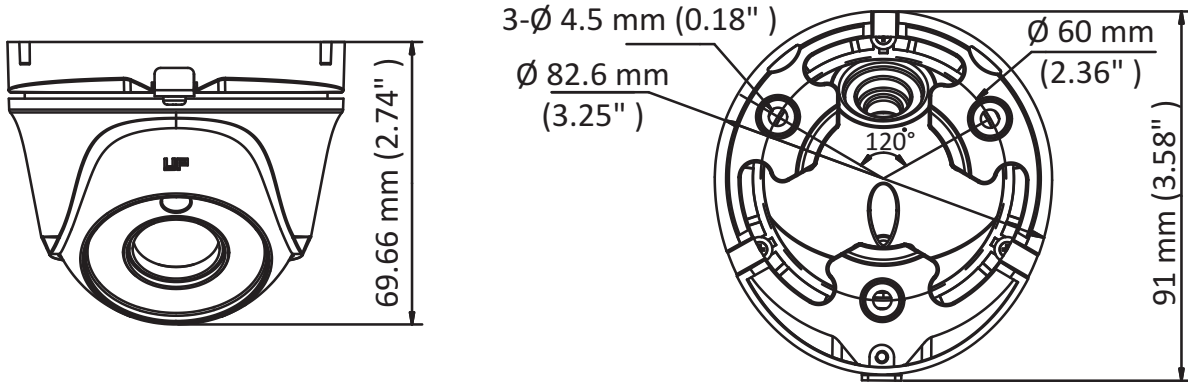

ACCESSORY



HLDS-1272ZJ-110
Wall Mounting Bracket



HLDS-1275ZJ-SUS
Vertical Pole
Mounting Bracket



HLDS-1276ZL-SUS
Corner Mounting Bracket



HLDS-1280ZJ-XS
Junction Box

FIRE • SECURITY • INTERCOMS