



# LIFESAVER

**RF INTERLINK BASEPLATE.**

**FOR LIFESAVER 5800 SERIES SMOKE ALARMS.**



## MODEL LIFWMB2

# WIRELESS INTERLINK BASE

The PSA LIFESAVER LIFWMB2 is a smoke alarm baseplate with built in RF interlink module.

Installed on a LIFESAVER 5800 Series mains powered smoke alarm, it is capable of wirelessly interlinking with other LIFESAVER 5800 series smoke alarms. When one smoke alarm sounds, it will activate other smoke alarms in the same RF interlink network.

The PSA LIFESAVER LIFWMB2 RF interlink protocol is compatible with the LIFESAVER LIF10YPEW battery operated smoke alarm with wireless interlink.

### FEATURES:

- RF baseplate to interlink LIFESAVER 5800 series smoke alarms wirelessly, Gen 2.
- When a smoke alarm triggers, it activates other smoke alarms wirelessly in the network
- Wirelessly interlink up to 24 units
- Fully monitored and supervised wireless network
- Approved and Certified to AS/NZS4268:2017
- Compatible with LIFESAVER 10 year wireless smoke alarm LIF10YPEW

### SPECIFICATIONS

Model	LIFWMB2
Operation	interconnect up to 24 units
Power	From smoke alarm
RF Frequency	918MHz
RF Range	100m line of sight 30m indoors
Temperature Range	0°C to 45°C
Humidity Range	Up to 95% relative humidity (RH)
Warranty	5 years - manufacturer's warranty
Compliance	AS/NZS 4268:2017 AS/NZS 60950.1:2015 RCM. Manufactured to ISO9001 Standard

### ACCESSORIES

LIF5800/2	Smoke Alarm 240VAC with 9V battery backup. Photoelectric.
LIF5800RL/2	Smoke Alarm 240VAC with lithium battery backup. Photoelectric.
LIF10YPEW	Smoke Alarm 10 Year battery operated with RF interlink. Photoelectric.




\*Refer to Installation and User Manual for further information and programming.  
Due to PSA commitment to continual product improvement, specification may change without notice.

FIRE • SECURITY • INTERCOMS

1300 772 776 enquiry@psaproducts.com.au  
psaproducts.com.au




# CONNECTION DIAGRAMS

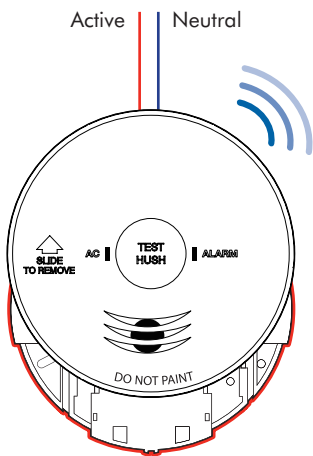


Lifesaver 5800 Series  
Smoke Alarm  
with WMB2  
Wireless Baseplate

Wireless  
Interconnect  
918MHz

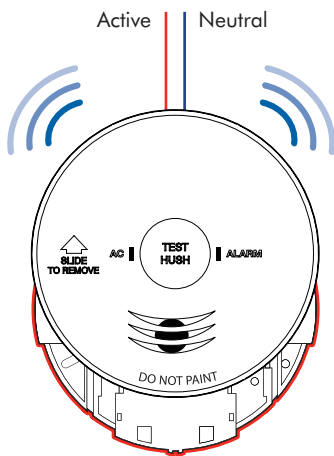


Lifesaver 5800 Series  
Smoke Alarm  
with WMB2  
Wireless Baseplate

Wireless  
Interconnect  
918MHz

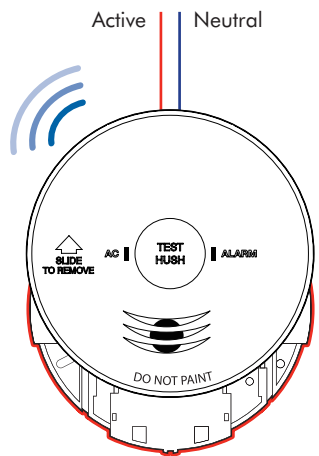


Lifesaver 5800 Series  
Smoke Alarm  
with WMB2  
Wireless Baseplate

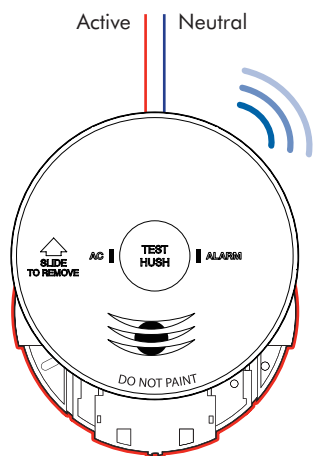


Lifesaver 5800 Series  
Smoke Alarm  
with WMB2  
Wireless Baseplate

Wireless  
Interconnect  
918MHz

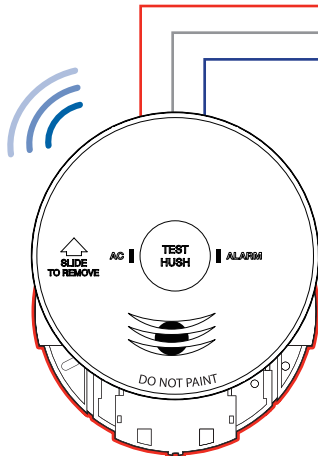

Lifesaver 5800 Series  
Smoke Alarm  
with WMB2  
Wireless Baseplate

Hardwire Connection

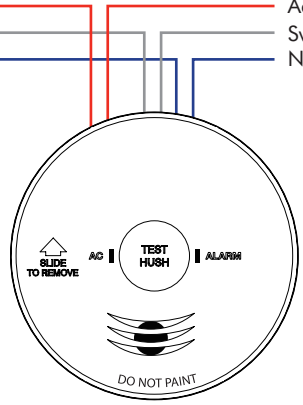

Lifesaver 5800 Series  
Smoke Alarm



17 Millicent Street, Burwood, VIC 3125 Australia  
Tel: 1300 PSA PRODUCTS (1300 772 776)  
Fax: (03) 9888 9993  
enquiry@psaproducts.com.au

[psaproducts.com.au](http://psaproducts.com.au)

Available From: