



# Farcode

Security  
around You

■ FC42



■ FC32P




■ FC52P



■ FC21E



- Farcode is the Keypads series from Aci Farfisa designed to meet the needs of security and access control.
- It is a practice, functional and simple to use range. The keypads, available in flush and surface mounting version, are easy to install, user friendliness and featured with high reliability.
- The quality of materials and components makes the keypads resistant to water and shocks.
- Farcode products, thanks to a modern and elegant design, are the ideal solution for public, residential and industrial installations.

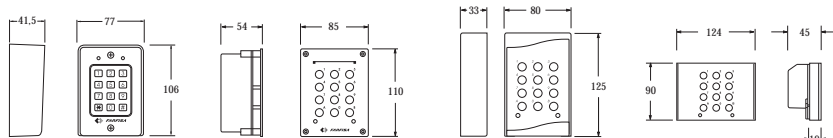

KEYPADS

|                                 | FC21E   | FC32P  | FC42   | FC52P   |
|---------------------------------|---|--|--|---|
| Use/Placement                   | Indoor  | Outdoor  | Outdoor  | Outdoor   |
| Keypad                          | Plastic front plate, buttons and box.   | Stainless Steel front plate and buttons vandal resistant.  | Stainless Steel front plate and buttons vandal resistant.  | Aluminium front plate MODY series, Stainless Steel buttons  |
| Relay(s) operation              | One relay for lock opening, access control, etc. 8 programmable codes from 2 to 6 digits. | Two relays for lock opening, access control, etc. 4 programmable codes from 2 to 6 digits for each relay. Possibility to activate relay 2 with single button. Relay 1 can be activated by pressing an additional Exit Button | Two relays for lock opening, access control, etc. 12 programmable codes from 1 to 8 digits for each relay. Possibility of relays activation with single button. Relays can also be activated by pressing additional Exit Buttons. Degree of protection IP45. | Two relays for lock opening, access control, etc. 4 programmable codes from 2 to 6 digits for each relay. Possibility to activate relay 2 with single button. Relay 1 can be activated by pressing an additional Exit Button. |
| Relay(s) Programming/activation | Programmable timer from 1 to 99 seconds or bistable operation                             | Programmable timer from 1 to 99 sec. or bistable operation of relay 1.   | Programmable timer from 1 to 99 sec. or bistable operation of relay 1.   | Programmable timer from 1 to 99 sec. or bistable operation of relay 1.  |
| Mounting                        | Surface mounting without back box.  | Flush mounting.  | Surface mounting without back box.   | Flush or Surface mounting by accessories MODY series.   |
| Power Supply                    | 12Vac/dc  | 12Vac/dc   | 12Vac/dc   | 12Vac/dc  |
| Dimensions in mm (wxhxd)        | 77 x 106 x 41,5   | 85 x 110 x 54  | 80 x 125 x 33  | 124 x 90 x 45   |

TRANSFORMER

PRS210

15VA Transformer. 127-230V. 13Vac. VDE Certification. 3A modules on DIN bar.



ACI srl

Via Loretana, 134 • 60021 Camerano (An) Italy • Tel (+39) 071.959631/2  
Fax (+39) 071.95150 • e-mail: aciservice@acifarfisa.it • www.acifarfisa.it